


Tiger™ ROTARY AND FLAIL **RailKut**



Productivity. Performance. Power.

With the power and versatility of this innovative machine you can mow along rail, trim low branches or clear a highway intersection. Once job is done, you can drive the RailKut at highway speeds, improving overall productivity. Available in 22' and 24' boom lengths.

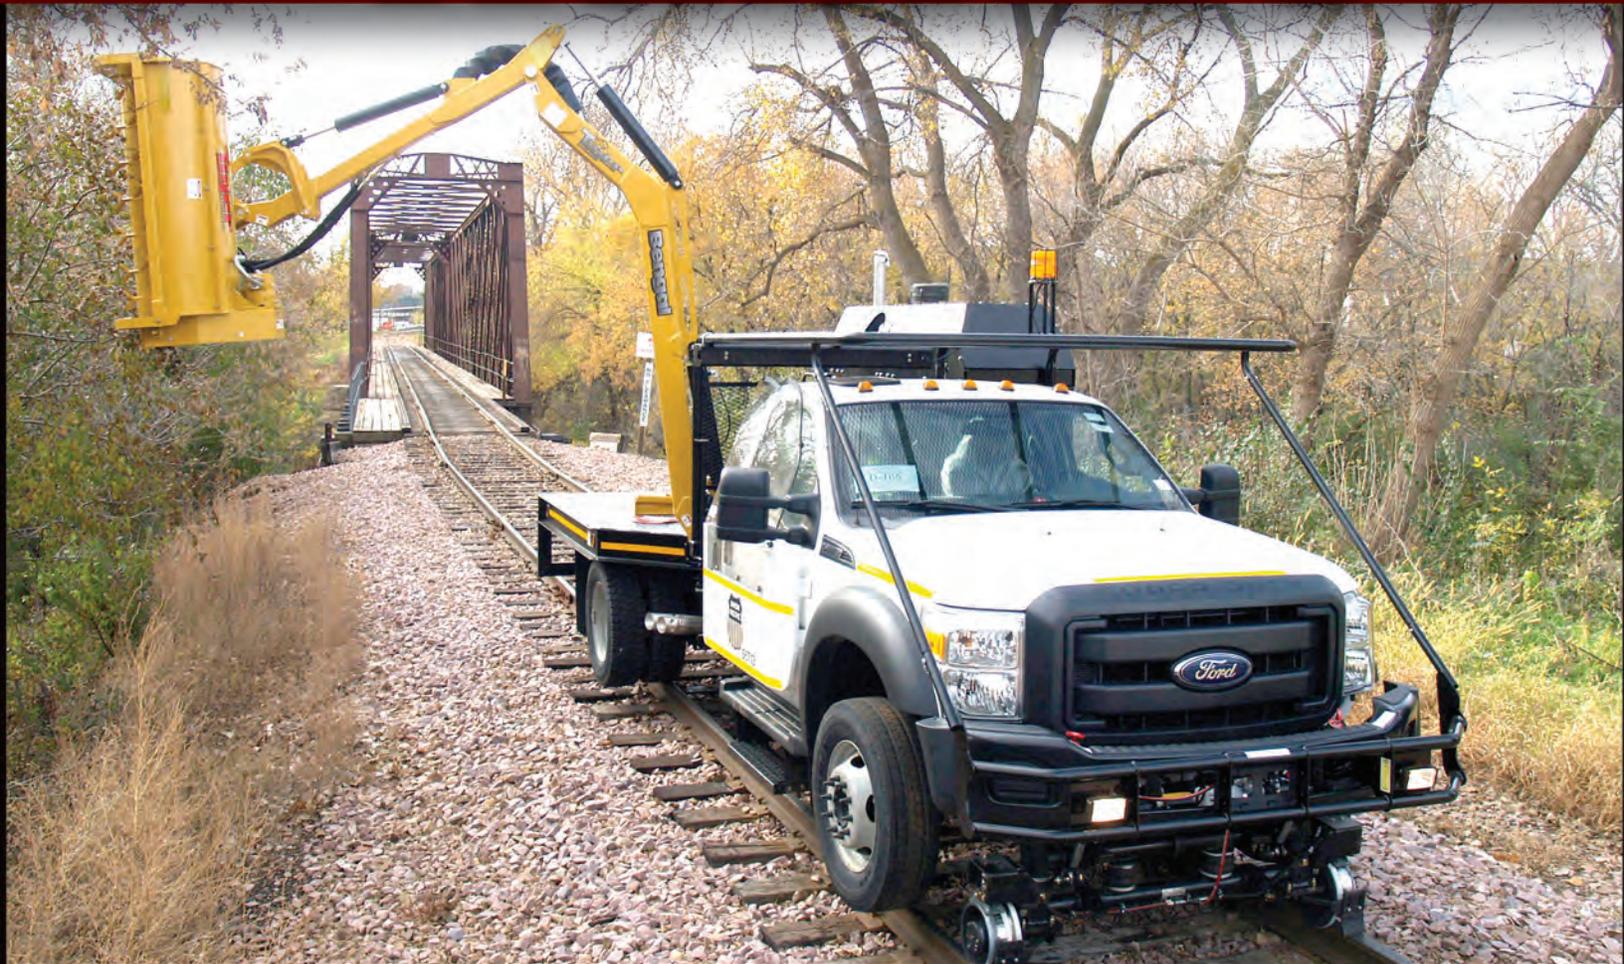

DURABILITY INNOVATION

COMMITMENT



Features include right side viewing camera. Standard equipment on the RailKut. Allows operator clear view of cutter head in operation while facing forward and steering vehicle.



Viewing Monitor located in cab of truck.

Tiger Specifications

Truck

F550 TRUCK SAFETY FEATURES

Four Wheel Drive Truck

Engine Turbo 8 cyl. Diesel
Horsepower 325 HP @ 3,300 RPM
Fuel Tank 40 gallon, Supplies Both Engines
Steering Dual Station, Power
Hyrail System Bolt On Rated to 28,000 lbs.
Manual Locking, Up and Down
Brakes Hydraulic Front

Master ON/OFF Switch
Operator Presence Switches on Right Side Door
Mower Safety Start Switch
Brush Guard Extending Over Cab
Operator Protective Screen Covers Right Hand Door
Manual Emergency Over-ride

Accessories
Snowblower
Saw Blade
Tree Shear and Auger
Fire Suppression
Turbine Blower
Boom Sweeper

RailKut

Engine Type Tier 4 Final 4 Cyl., Turbo Diesel
Horsepower 74 HP @ 1,800 RPM
Throttle Control Electronic Adjustable
Hydraulic System 45 GPM @ 3,250 PSI
Safety Stop 7 Second Shut Down
Truck Bed Quick Removable



SNOW BLOWER



SAW BLADE



TIGER AUGER



TREE SHEAR

Standard Equipment

Spare Tire and Rim
Torque Wrench with Rotary head
Directional Light Bar
Emergency Hyrail Retract



OPTIONAL TRAILER HITCH



FIRE SUPPRESSION



TURBINE BLOWER



BOOM SWEEPER



DITCHER

Boom Mower

RK-22 RK-24 ROTARY FLAIL

	RK-22	RK-24		ROTARY	FLAIL
Cutter Reach Up	19' 10"	21' 2"	Cutting Width	50"/ 60"	50"/ 63"
Cutter Reach Out	21' 6"	23' 2"	Cutting Head Weight	785 lbs. (Minimum)	835 lbs. (Minimum)
Cutter Reach Down	12' 5"	13' 5"	Cutting Assembly	One-piece forged alloy spindle with stationary wire guards and a one-piece formed dishpan.	61" knife swing circumference 2,200 RPM cutter shaft
Controls	Electronic Joystick	Electronic Joystick	Blade Options Full Swing	Two, Three, Four or Six	24 cast, 33 oz. knives 48 all-purpose knives
Transport Width	8' 6"	8' 6"	Brush	5/8" x 5" x 17.125"	
Transport Stow Height	11' 8"	13' 5"	Grass (High Suction)	5/8" x 5" x 17.125"	

Tiger Corporation
3301 N. Louise Ave.
Sioux Falls, SD 57107
800.843.6849
www.tigermowers.com



An Alamo Group® Company

Specifications are subject to change without notice.
Optional equipment may be shown. One Year Warranty on all products.

Dealer Info:
RBL, INC / ROBOLUBE
56 Plymouth Avenue North
Minneapolis, MN 55411
Phone: 612.339.9395
www.rblinc.com



MADE WITH PRIDE IN THE USA