


SPEARHEAD

BARRIER MOWER




BARRIER MOWER FEATURES

REAR MOUNT

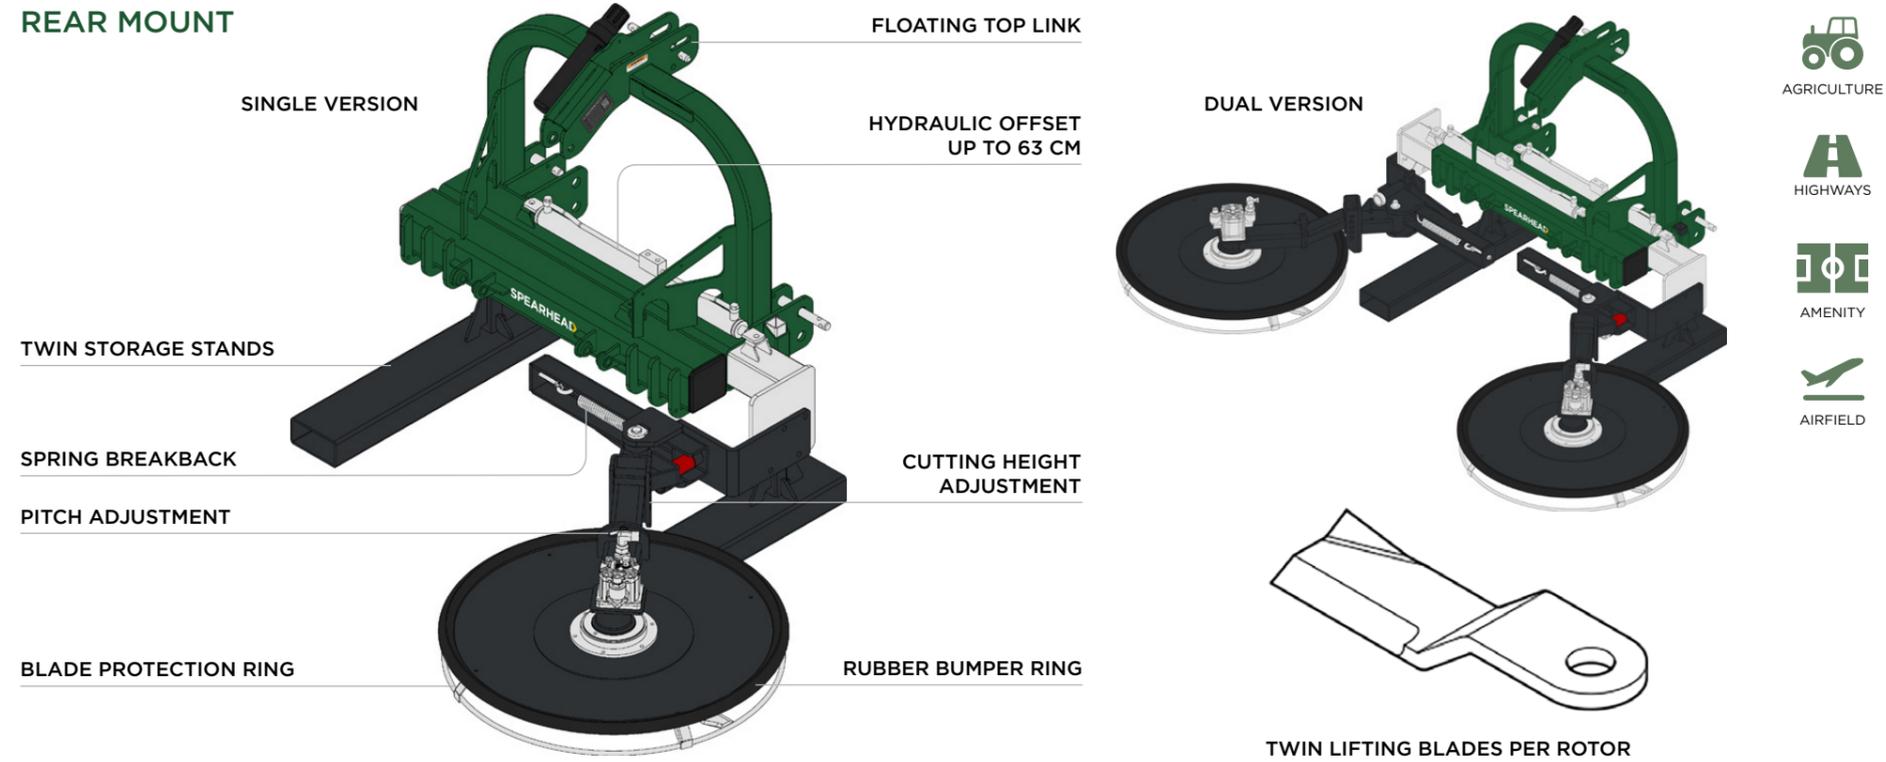

FRONT MOUNT

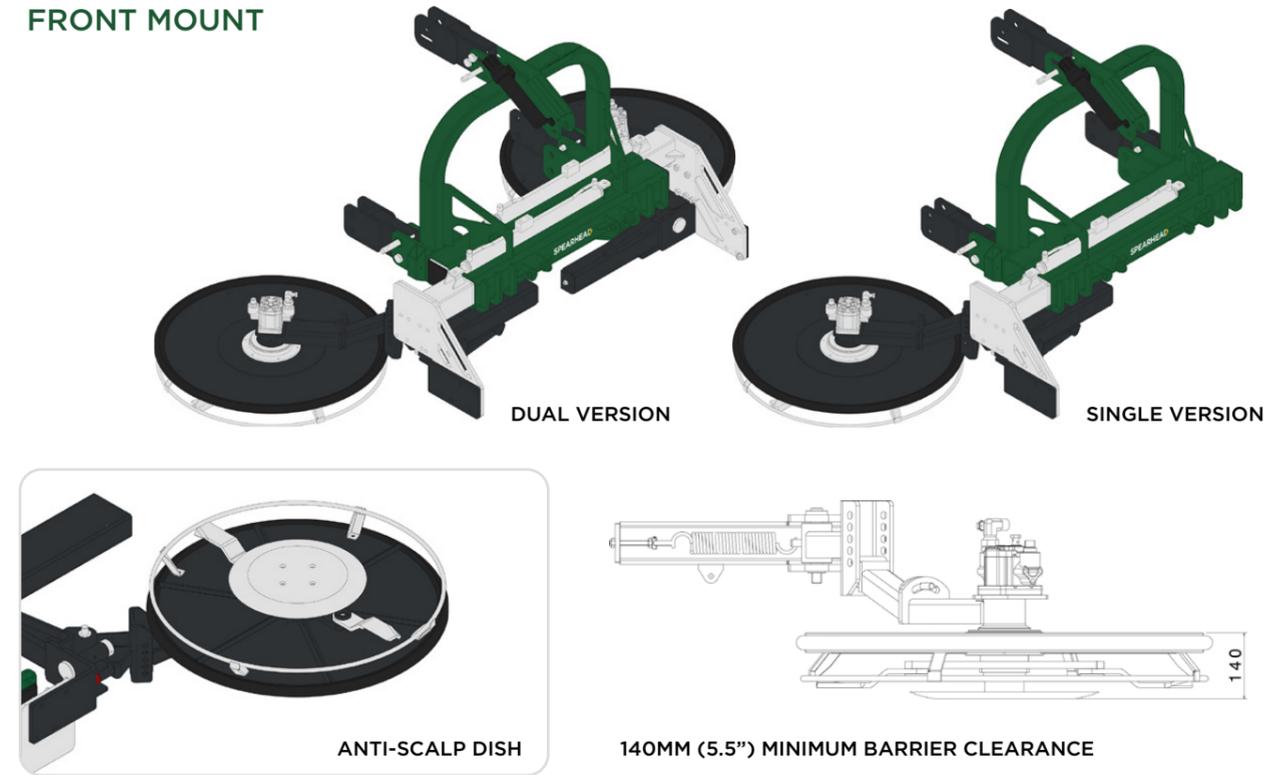

The Spearhead Barrier Mower is the perfect tool for airfield, agriculture, amenity and highway applications for cutting under roadside crash barriers, fence posts, fence wires and round the base of trees.

Available in front mount or rear mount guises and left-hand, right-hand or even dual build configurations the Barrier Mower gives an 80cm cutting diameter provided by twin lifting blades and an accompanying anti-scalp dish to leave a consistent finish.

The machine features an automatic spring breakback arm system which allows the machine to cut around the smallest of items. The machine also features hydraulic sideshift to deal with any working environment all controlled from the comfort of the cab of the tractor.

	WEIGHT	CUTTING WIDTH	HITCH TYPE	MAXIMUM OFFSET DISTANCE (HYD)	MINIMUM CUTTING HEIGHT	MINIMUM BARRIER CLEARANCE	FLOW RATE	BLADE QUANTITY	TRACTOR SPOOLS REQUIRED
BARRIER MOWER SINGLE	310kg (683lbs) 353kg (778lbs)*	80cm (2' 7")	CAT II	63cm (2' 1")	25mm (1")	140mm (5.5")	35 l/min	2	2
BARRIER MOWER DUAL	415kg (915lbs) 458kg (1010lbs)*	80cm (2' 7") x2	CAT II	63cm (2' 1") x2	25mm (1")	140mm (5.5")	70 l/min	4	4

UNIT OPTIONS

FRONT MOUNT KIT

*Front mount version



SPECIFICATION	BARRIER MOWER SINGLE	BARRIER MOWER DUAL
Machine weight - rear mount	310kg (683lbs)	415kg (915lbs)
Machine weight - front mount	353kg (778lbs)	458kg (1010lbs)
Hitch type	CAT II	CAT II
Hitch position	Front and rear mount	Front and rear mount
Cutting width	80cm (2' 7")	80cm (2' 7") x2
Minimum machine width	207cm (6' 9")	270cm (8' 10")
Maximum machine width	267cm (8' 9")	390cm (12' 9")
Minimum machine length	143cm (4' 8")	143cm (4' 8")
Maximum machine length	155cm (5' 1")	155cm (5' 1")
Maximum offset distance (hydraulic)	63cm (2' 1")	63cm (2' 1") x2
Height	115cm (3' 9")	115cm (3' 9")
Minimum cutting height	25mm (1")	25mm (1")
Minimum barrier clearance	140mm (5.5")	140mm (5.5")
Maximum cutting capacity	20mm (0.8")	20mm (0.8")
Recommended tractor HP	30-100hp (22-75kw)	30-100hp (22-75kw)
Blade	Lifting blade	Lifting blade
Blade Bolts	M18	M18
Blade quantity	2	4
Blade tip speed	70 m/s (13780 fpm)	70 m/s (13780 fpm)
Hydraulic system drive	Gear	Gear
Motor construction	Aluminium	Aluminium
Flow rate	35 l/min	70 l/min
Tractor spools required	2	4

SPEARHEAD

📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England ☎ +44 (0)1789 491860

✉ enquiries@spearheadmachinery.com 📧 spearheadmachinery.com 🐦 📘 SpearheadWorld

