


# SPEARHEAD


ROLLICUT 170/230/290






# ROLLICUT 170/230/290 FEATURES

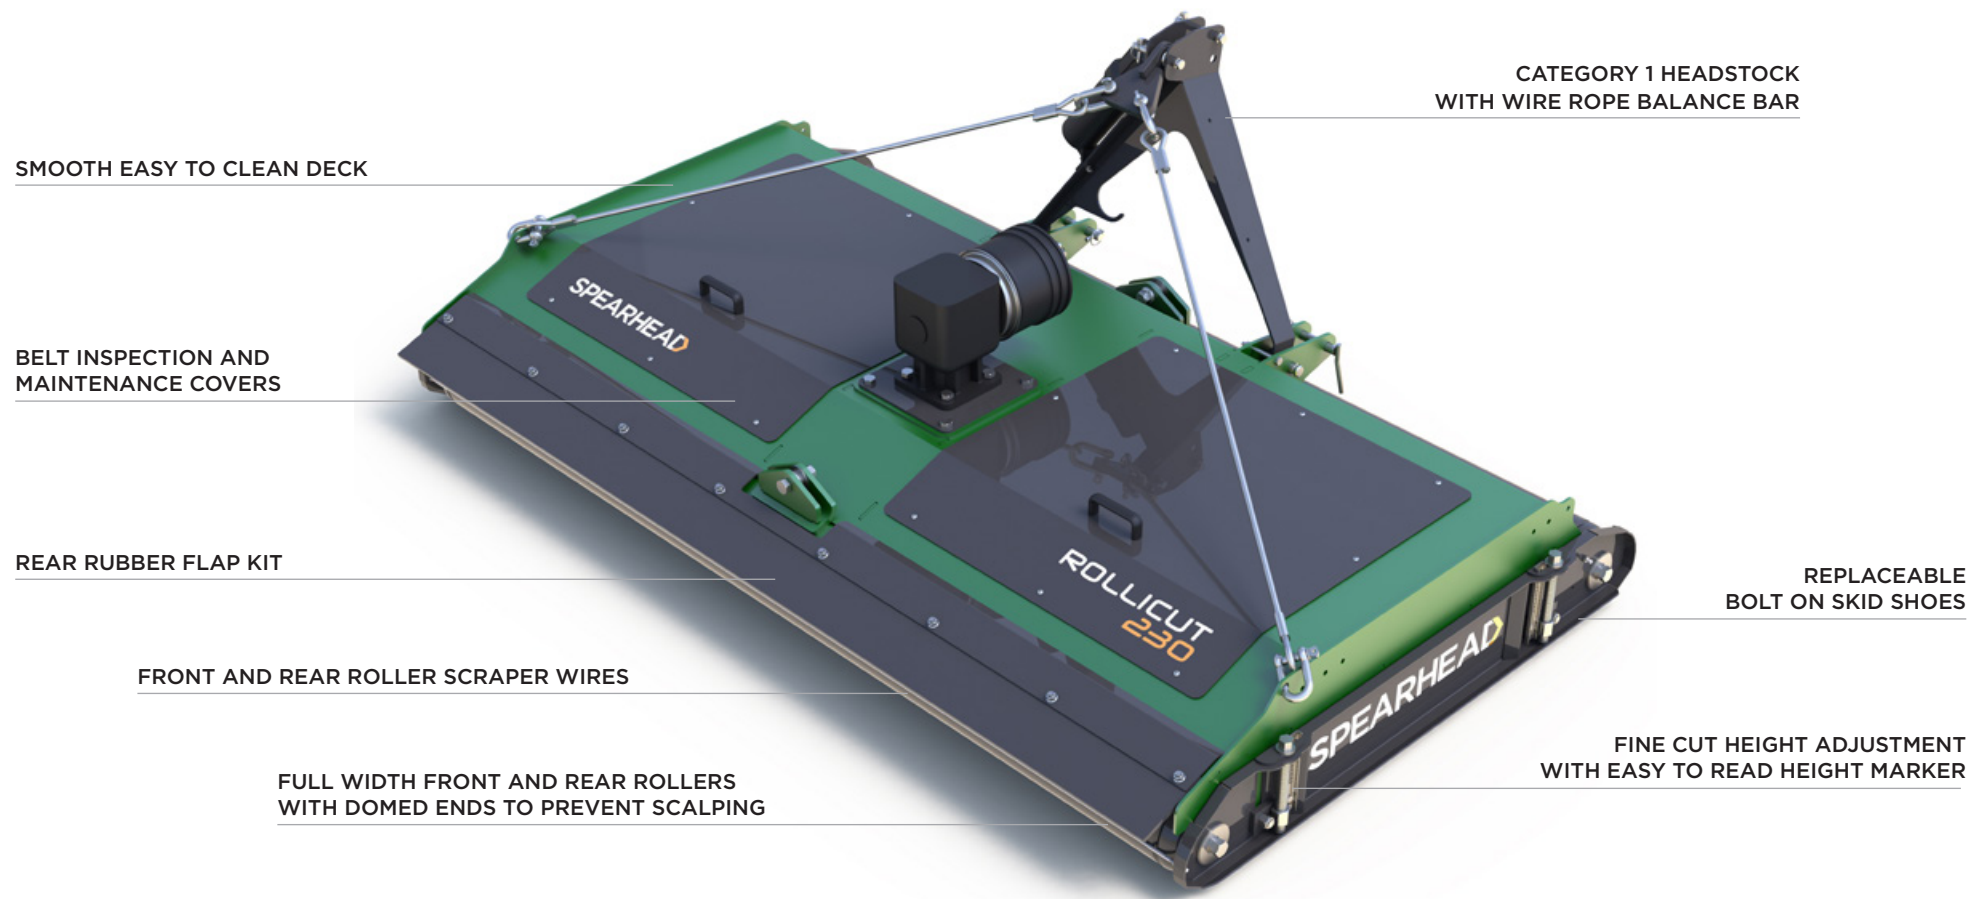

	 TRACTOR HP	 PTO SPEED	 TRANSPORT WIDTH	 3 POINT LINKAGE MOUNTING	 CUTTING WIDTH	 BLADE TYPE	 NUMBER OF BLADES	 CUTTING HEIGHT
<b>ROLLICUT 170</b>	35hp (27kW)	540rpm	1.86m (6' 2")	✓	1.74m (5' 8")	Fine cut, high lift	9	0mm - 110mm (0" - 4.3")
<b>ROLLICUT 230</b>	45hp (34kW)	540rpm	2.42m (7' 11")	✓	2.30m (7' 6")	Fine cut, high lift	12	0mm - 110mm (0" - 4.3")
<b>ROLLICUT 290</b>	55hp (41kW)	540rpm	3.02m (9' 11")	✓	2.92m (9' 7")	Fine cut, high lift	15	0mm - 110mm (0" - 4.3")

# ROLLICUT 170/230/290 THE COMPACT AND COST-EFFECTIVE FLAIL

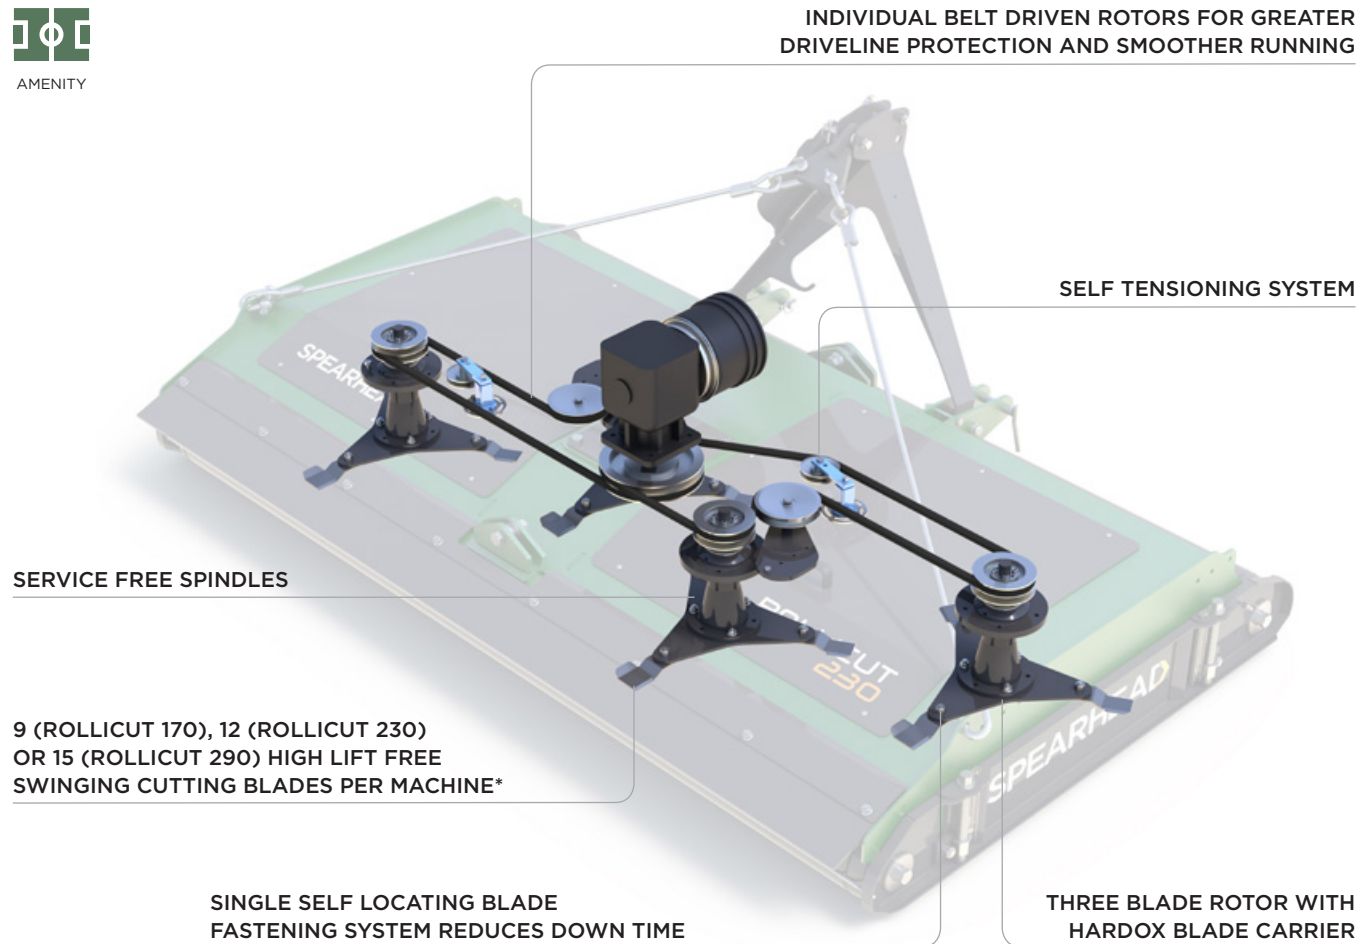

The Spearhead Rollicut inline mower is designed for light-duty amenity mowing and gives a high-quality finish in material up to 20mm. It excels in parkland, golf course, orchard and topping applications and is the perfect choice for mounting on compact tractors.

This cost-effective inline range is available in either 1.7, 2.3 or 2.9 metre cutting widths, featuring three, high suction style blades per rotor designed to offer a comparable finish to conventional cylinder mowers; but without the expensive maintenance costs.

Self-tensioning belt drive gives reliable power transmission, and with 168mm full width fine adjustment front and rear rollers, heavily baffled deck design and rear rubber flap, a fine mulch cut and well distributed finish, is guaranteed.

\* Rollicut 230 machine shown  
Rollicut 170 machines feature three cutting rotors  
Rollicut 230 machines feature four cutting rotors  
Rollicut 290 machines feature five cutting rotors

STANDARD SPECIFICATION	ROLLICUT 170	ROLLICUT 230	ROLLICUT 290
Machine weight	540kg (1191lbs)	630kg (1389lbs)	860kg (1896lbs)
Hitch	Category 1 with floating clevis top link	Category 1 with floating clevis top link	Category 1 with floating clevis top link
Hitch position	Rear mount only	Rear mount only	Rear mount only
Cutting width	1.74m (5' 8")	2.30m (7' 6")	2.92m (9' 7")
Working width	1.86m (6' 2")	2.42m (7' 11")	3.02m (9' 11")
Overall length	1.40m (3' 11")	1.40m (3' 11")	1.40m (3' 11")
Cowl height	490mm (1' 8")	490mm (1' 8")	490mm (1' 8")
Cutting height	0mm - 110mm (0" - 4.3")	0mm - 110mm (0" - 4.3")	0mm - 110mm (0" - 4.3")
Cutting capacity	20mm (0.8")	20mm (0.8")	20mm (0.8")
Recommended tractor HP	35hp (27kW)	45hp (34kW)	55hp (41kW)
Power take-off speed	540rpm	540rpm	540rpm
Gearbox	Cast iron housing	Cast iron housing	Cast iron housing
Input shaft	1-3/8" Z6 and 35mm output shaft	1-3/8" Z6 and 35mm output shaft	1-3/8" Z6 and 35mm output shaft
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity	1.3 litres (2.3 pints)	1.3 litres (2.3 pints)	1.3 litres (2.3 pints)
Cowl construction	All welded construction	All welded construction	All welded construction
Skid construction	Replaceable bolt-on skid	Replaceable bolt-on skid	Replaceable bolt-on skid
Blades	Fine cut, high lift	Fine cut, high lift	Fine cut, high lift
Blade quantity	9	12	15
Blade tip speed	87m/s (17126 fpm)	87m/s (17126 fpm)	87m/s (17126 fpm)
Roller diameter (front + rear)	168mm (6.5")	168mm (6.5")	168mm (6.5")

# SPEARHEAD

📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England 📞 +44 (0)1789 491860

✉️ enquiries@spearheadmachinery.com 📧 spearheadmachinery.com 🐦 f SpearheadWorld



designed and built in  
**GREAT BRITAIN**

Spearhead  
is a member of the  
**Alamo Group**