

SPEARHEAD

SNIPER COMPACT



SNIPER COMPACT FEATURES

DUAL BELT DRIVE WITH 540/1000RPM
ADAPTABILITY BY REVERSING DRIVE PULLEYS

INTEGRATED ENCLOSED
CONNECTING SHAFT

OPENING INSPECTION
AND MAINTENANCE HOOD*


FULL WIDTH RUBBER
REAR PROTECTION FLAPS

REAR ROLLER HEIGHT ADJUSTMENT

CATEGORY 1/2 HEADSTOCK
WITH FLOATING CLEVIS TOP LINK

HEAVY DUTY GEARBOX
WITH FREEWHEEL CLUTCH

100MM MANUAL OFFSET

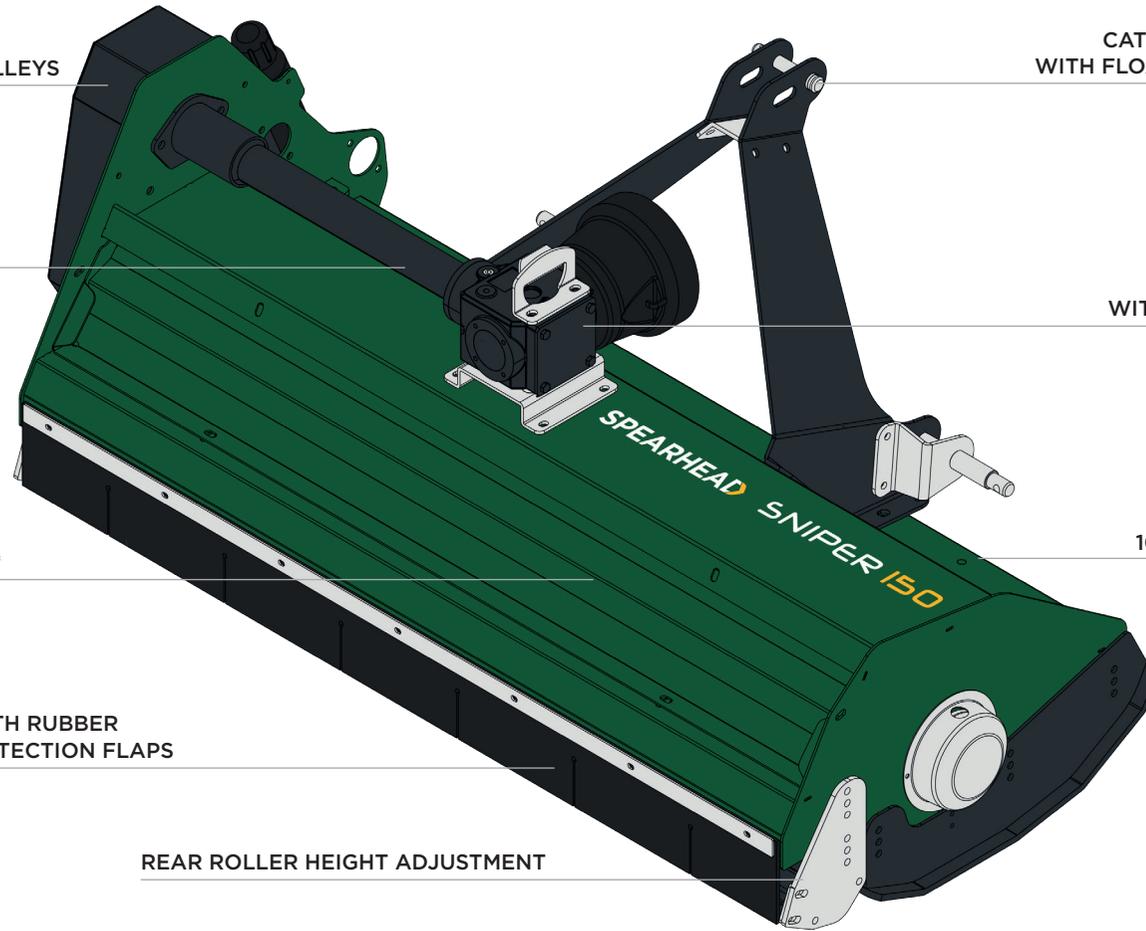

TRACTOR HP

15hp (12kW)



PTO SPEED

540/1000rpm



TRANSPORT WIDTH

1.67m (5' 6")



3 POINT LINKAGE
MOUNTING



CUTTING WIDTH

1.50m (4' 11")



FLAIL TYPE

Heavy-duty
hammer flail



NO. OF FLAILS

22




CUTTING HEIGHT

10mm - 50mm
(0.4" - 2")

SNIPER 150

COMPACT FLAIL WITH HEAVY DUTY PERFORMANCE

-  AGRICULTURE
-  PASTURE
-  AMENITY
-  LIGHT SCRUB

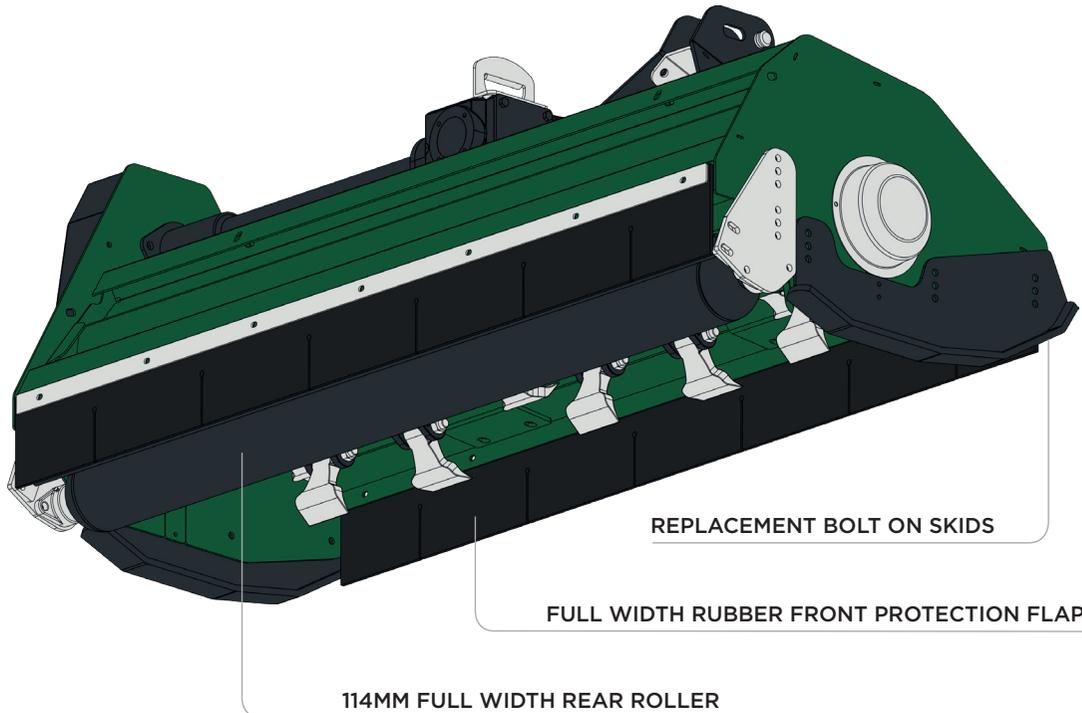

The Sniper 150 compact flail mower is the perfect choice for the small holder or small scale amenity user with an eye for achieving a high quality and consistent cut in pasture, paddock and general vegetation control applications when working with a compact tractor.


This robust machine features heavy duty hammer flails fitted on an electronically balanced spiral rotor ideally suiting it for light scrub clearance in material up to 30mm. Dependable power transmission is given through dual belt drive and in combination with full width adjustable skids and rear roller with scraper to ensure a quality, well distributed cut.

The Sniper 150 features a cutting width of 1.5 metres with an adjustable mounting headstock that can be manually offset by 100mm to further aid the working requirements of the operator.



HELICAL SPIRAL ROTOR

HEAVY DUTY HAMMER FLAILS TO CUT UP TO 30MM MATERIAL

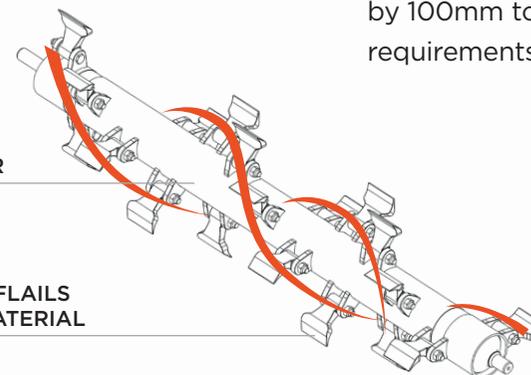

SPECIFICATION		SNIPER 150	
Machine weight	235kg (518lbs)	Gearbox	Cast iron housing with integrated enclosed connecting shaft
Hitch	Category 1-2 with floating clevis top link	Input shaft	1' 3/8" Z6
Hitch position	Rear mount only	Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil
Cutting width	1.50m (4' 11")	Gearbox oil capacity	0.8 litres (1.7 pints)
Overall width	1.67m (5' 6")	Cowl construction	All welded construction
Overall length	0.78m (2' 7")	Skid construction	Replaceable bolt-on skid
Cowl height	442mm (1' 5")	Flails	Heavy-duty hammer flail
Cutting height	10mm – 50mm (0.4" – 2")	Flail quantity	22
Cutting capacity	30mm (1.2")	Flail tip speed	41m/s (8070 fpm)
Maximum offset distance (manual)	100mm (4")	Rotor diameter	114mm (4.5")
Minimum tractor HP	15hp (12kW)	Roller diameter	114mm (4.5")
Power take-off speed	540-1000rpm	Number of belts	2

SPEARHEAD

📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England ☎ +44 (0)1789 491860

✉ enquiries@spearheadmachinery.com 📧 spearheadmachinery.com 🐦 📘 SpearheadWorld

