

SPEARHEAD

STUBBLE MASTER 730



The capability of the Stubble Master 730 is designed to appeal to large scale farmers and contractors; demanding excellent output coupled with a fine mulch and efficient spread to ensure the very best in the effective management of crop stubble residues.

Boasting an abundance of intelligent design features the full specification of the Stubble Master 730 establishes it firmly at the top of its class.

Supplied standard with Spearhead's unique six-blade HD6 cutting system the machine chops vegetation fine and breaks down remaining residues to allow faster decomposition.

The machine also features a twin skin monocoque style deck design that includes both a smooth top and underside, encouraging self-cleaning whilst maintaining the most effective cutting performance and throughput in heavy crops.

The delta style shaping of the machine enhances material flow and drives an even spread from the back of the mulcher whilst various wheel and tyre options, fine cutting height adjustment and full width walking axles allow scalping of vegetation within touching distance of the soil.




TRACTOR HP	PTO SPEED	TRANSPORT WIDTH	CUTTING WIDTH	GEARBOX RATING	NUMBER OF WHEELS	NUMBER OF ROTORS	NUMBER OF BLADES	CUTTING HEIGHT
160hp	1000rpm	2.97m / 9' 9"	7.26m / 23' 10"	250hp & 111hp	8	5	30	25 - 400mm / 1" - 16"

STUBBLE MASTER 730

UNIT OPTIONS


6, 8 or 21 SPLINE PTO	AIR BRAKES	ARAMIDE BELT TYRES	MULTICUT TYRES	FRONT FLAP KIT	MUDGUARD KIT	REAR DRAWBAR
-----------------------	------------	--------------------	----------------	----------------	--------------	--------------

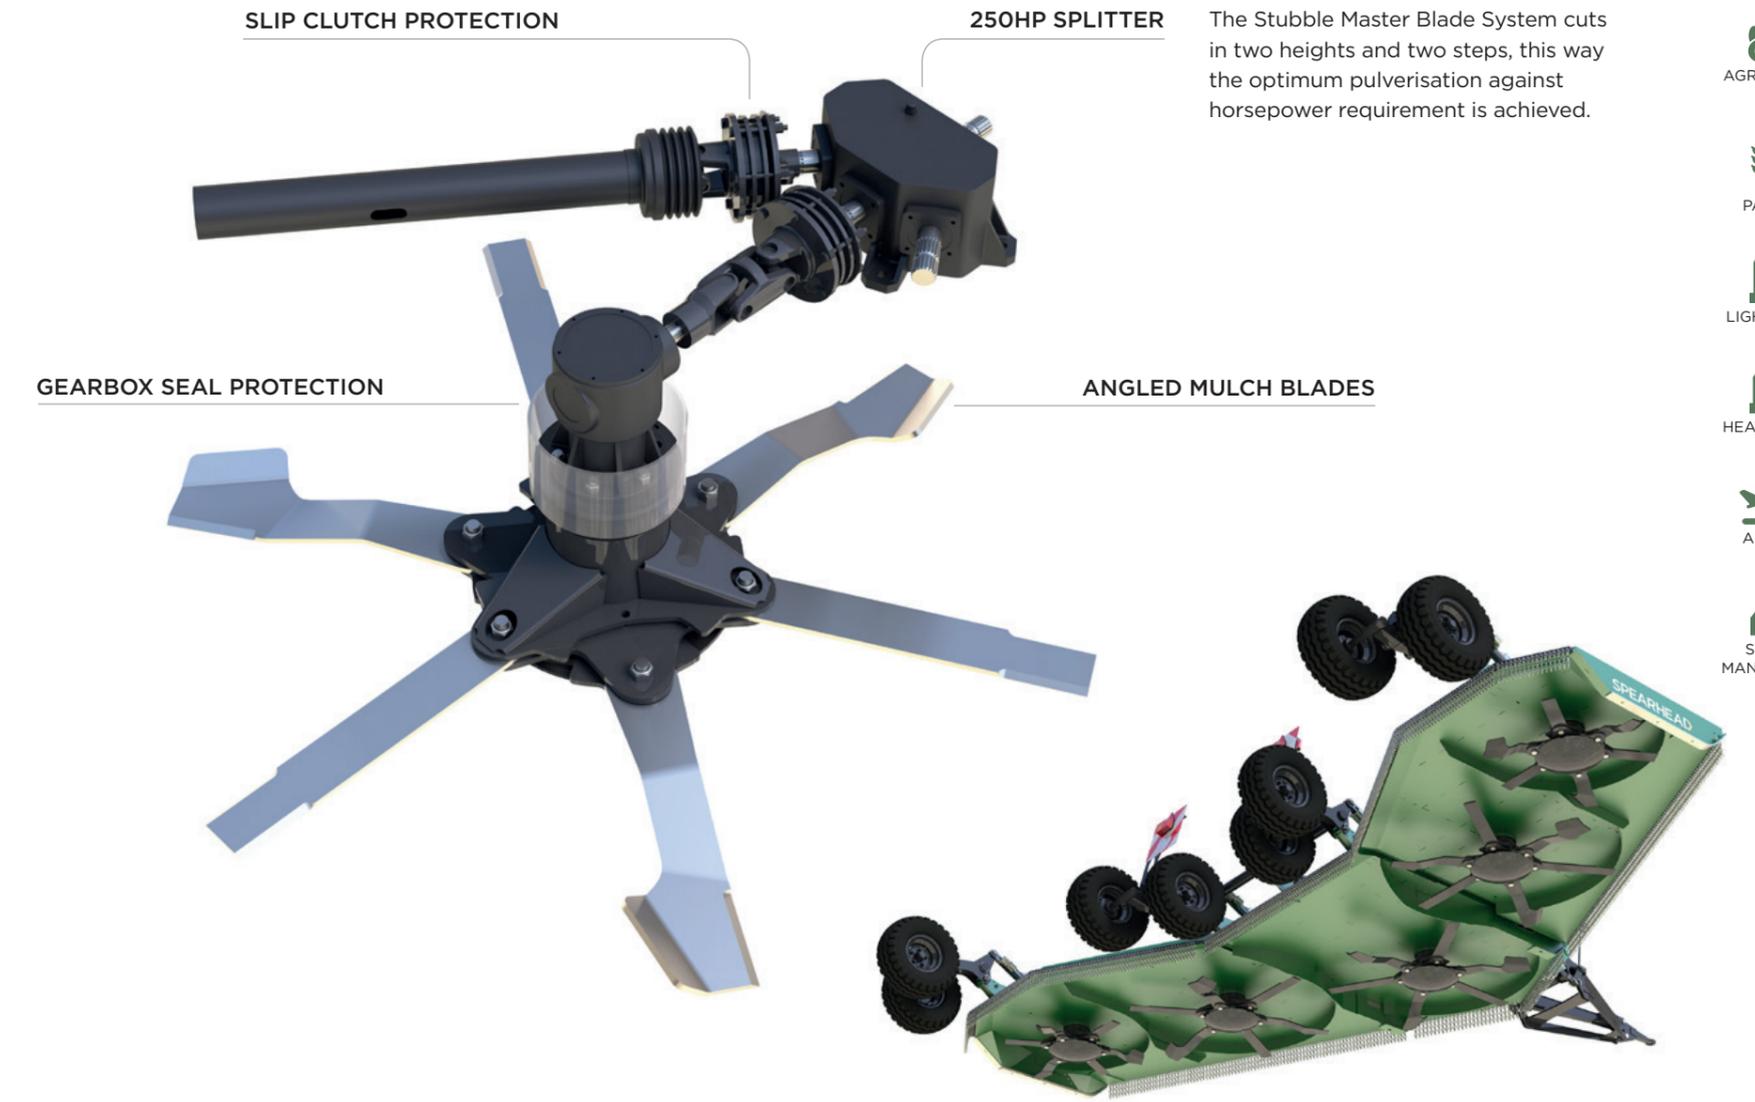


MACHINE	STUBBLE MASTER 730		
Machine weight*	3660kg / 8069lbs	Gearbox oil capacity [rotor gearboxes (x5)]	2.1 litres / 3.7 pints
Hitch	Multi-positional drawbar	Deck construction	All welded construction
Cutting width	7.26m / 23' 10"	Deck material thickness	3mm (1/8")
Working machine width	7.44m / 24' 5"	Side skirt material thickness	8mm (5/16")
Transport machine width	2.97m / 9' 9"	Skid construction	Replaceable bolt on skid shoes
Maximum working length	6.49m / 21' 5"	Anti-scalp dish	5mm (3/16") round pan with blade holder bar
Transport length	6.42m / 21' 1"	Blades standard (x15)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging high lift - low friction. Handed.
Deck height**	0.26m / 10"	Blades Starcut (x15)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging high lift - low friction. Non-handed.
Transport height	3.32m / 10' 11"	Blade bolts	M24 C/W shank grade 8.8
Cutting height	25mm - 400mm (1" - 16")	Blade tip speed	81mps / 15944fpm
Cutting capacity	100mm / 4"	Driveline	ASAE Category 6
Recommended tractor HP	160hp / 119kW	Driveline protection	2/4-way slip clutches on rotor gearboxes. Overrun on input shaft
Wing working angles	30° up / 7.5° down	Tailwheel mount assemblies	Tubular welded walking axles
Power take-off speed	1000rpm	Tailwheels (x8)	7.00-12 pneumatic tyre with steel hub
Gearbox [splitter]	Cast Iron housing	Front guard	Single chain guards on each deck
Gearbox [rotor gearboxes (x5)]	Cast Iron housing	Rear guard	Single chain guards on each deck
Input shaft	1-3/8" Z21 or Z6 SFT 8 tractor end or 1-3/4" Z20 or Z6 SFT 8 tractor end		
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil		
Gearbox oil capacity [splitter gearbox]	2.7 litres / 4.7 pints		

*With front and rear single chain guards ** Underside of deck to skid

STUBBLE MASTER 730 WORKING DIMENSIONS

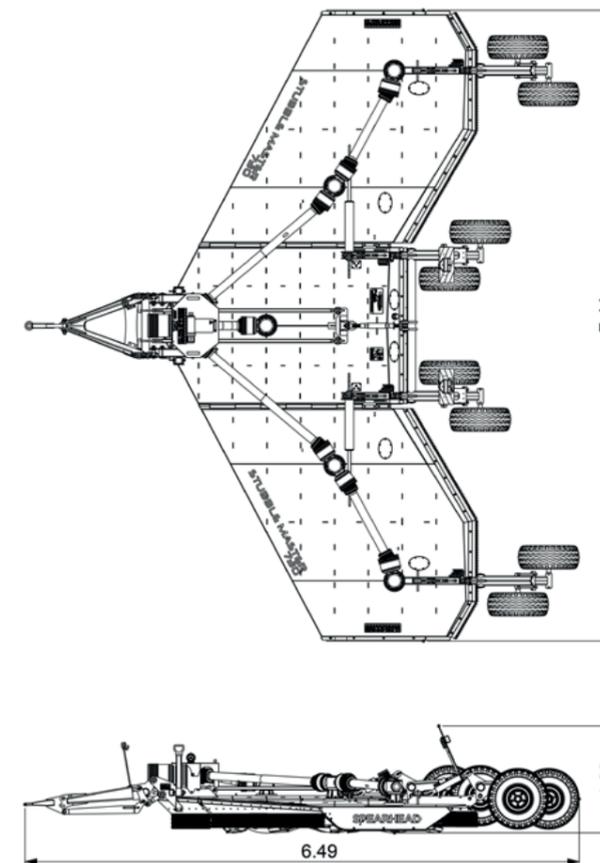

STUBBLE MASTER 730 TRANSPORT DIMENSIONS

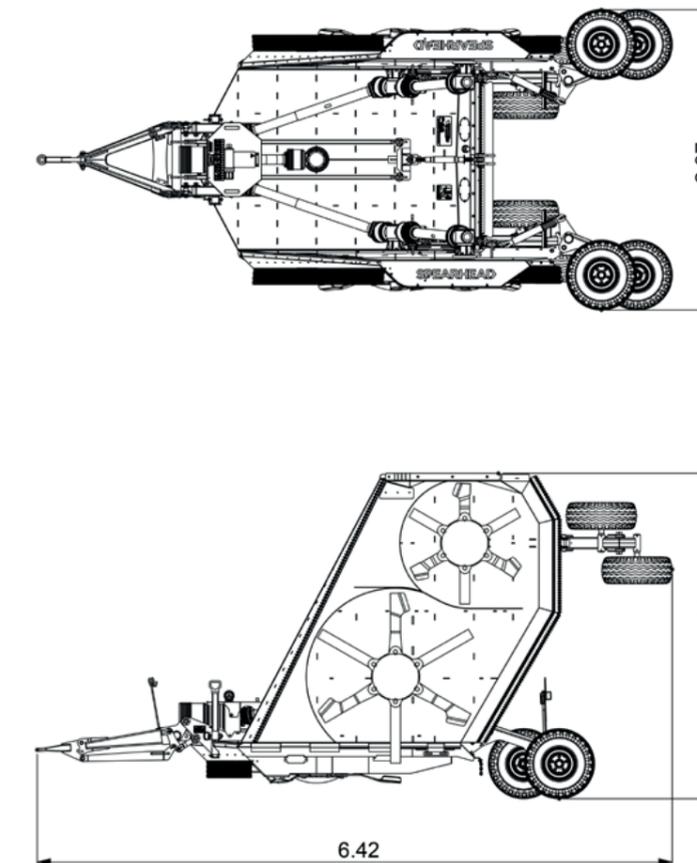

SPEARHEAD

📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England

☎ +44 (0)1789 491860

✉ enquiries@spearheadmachinery.com

🌐 spearheadmachinery.com

🐦 [Spearhead World](#)



designed and built in
GREAT BRITAIN 

Spearhead
is a member of the

Alamo Group