


DESTROYER



DESTROYER FEATURES

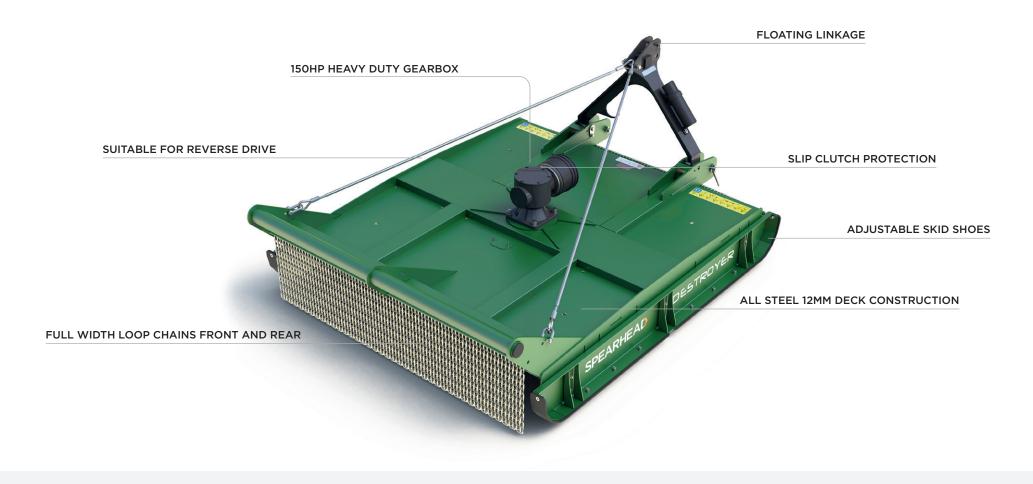

TRACTOR HP

100hp (75kW)

PTO SPEED

1000rpm

TRANSPORT WIDTH

2.20m (7' 3")



3 POINT LINKAGE MOUNTING



CUTTING WIDTH

1.90m (6' 2")



BLADE TYPE

Heavy duty dual cut



NO. OF BLADES

3

11111 **CUTTING HEIGHT**

25mm - 225mm

(1" - 9")

DESTROYER

UNIT OPTIONS






WHEN THE GOING GETS TOUGH, DESTROY IT









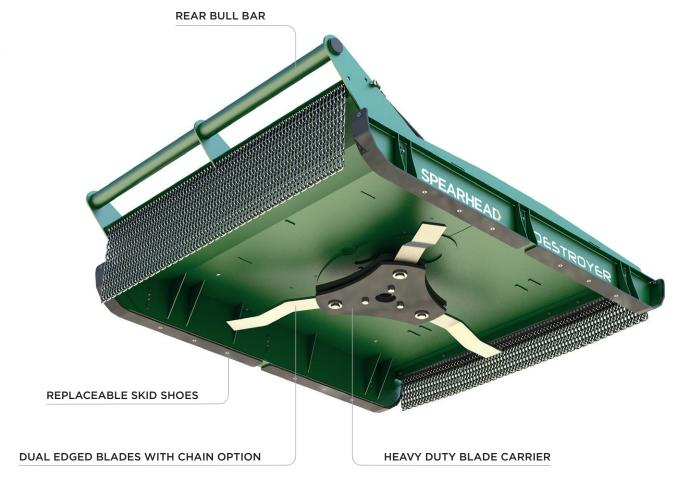

The Destroyer rotary mulcher is designed to cut and pulverize heavy scrub and forestry regrowth up to 150mm. It is the perfect choice for maintenance of areas such as woodland rides and waterway banks.

This highly robust machine features three, 15mm hardened blades designed to work in the most intense conditions. Power transmission is given through a 150hp heavy-duty gearbox with a 4-plate slip clutch on the input PTO shaft. Assistance to clearing scrub material effectively is given through a rear bull bar, flattening material before meeting the blades along with adjustable, extra wide skids.

The Destroyer rotary mulcher is available in a working width of 2.1 metres and is ideal for forward and reverse drive.

SPECIFICATION	DESTROYER		
Machine weight	1080kg (2381lbs)	Gearbox	Cast iron housing
Hitch	Category 2 with clevis top link	Input shaft	1' 3/8" Z21
Hitch position	Front and rear mount	Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil
Cutting width	1.90m (6' 2")	Gearbox oil capacity	3.5 litres (6.2 pints)
Overall width	2.20m (7' 3")	Cowl construction	All welded construction
Overall length	2.77m (9' 2")	Skid construction	Replaceable bolt-on skid
Cutting height	25mm - 225mm (1" - 9")	Blades	15mm Carbon Boron hardened and tempered. Free swinging.
Cutting capacity	150mm (5.9")		
Recommended tractor HP	100hp (75kW)	Blade quantity	3
Power take-off speed	1000rpm	Blade tip speed	66 m/s (12992 fpm)





